

Scanalyzer

Pre-rendered Barcodes

Table of Contents

[Scanning Templates](#)

[Computer Inventory](#)

[QRSpec](#)

[Education](#)

[Attendance](#)

[Grading](#)

[Pass and Fail](#)

[Library and Asset Management](#)

[Boolean States](#)

[Yes and No](#)

[True and False](#)

[Social Science](#)

[Emotions](#)

[Politics](#)

[Political Affiliation](#)

[For and Against](#)

[General](#)

Scanning Templates

Computer Inventory

Scan this to set up the column headers for QRSpec:



Scan one of these when using auto-delimiters:

Barcode GPS Timestamp




Barcode Timestamp GPS



Education


Attendance

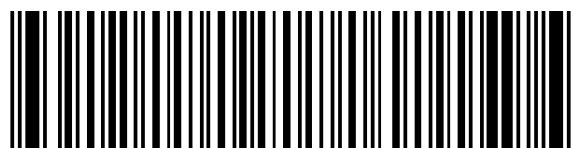

P r e s e n t




A b s e n t

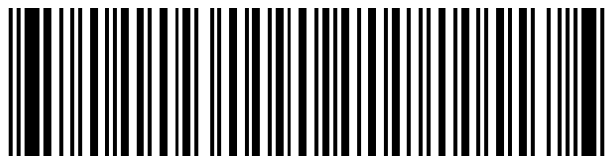


E x c u s e d



U n e x c u s e d




I l l

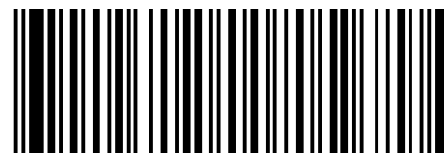


T a r d y

Grading

Pass and Fail

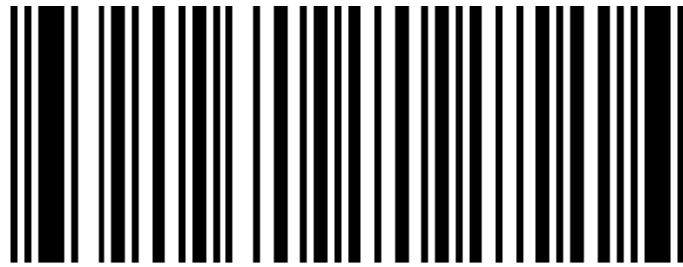


P a s s

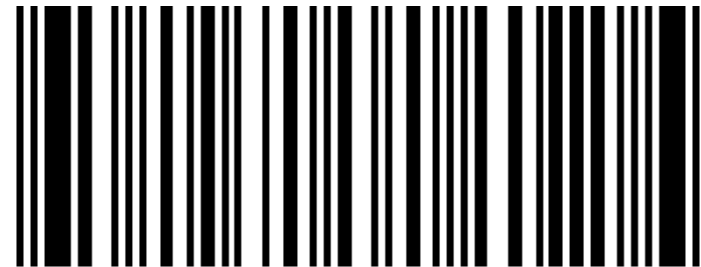


F a i l


Letter Grades



A



B



C




D




F

Library and Asset Management

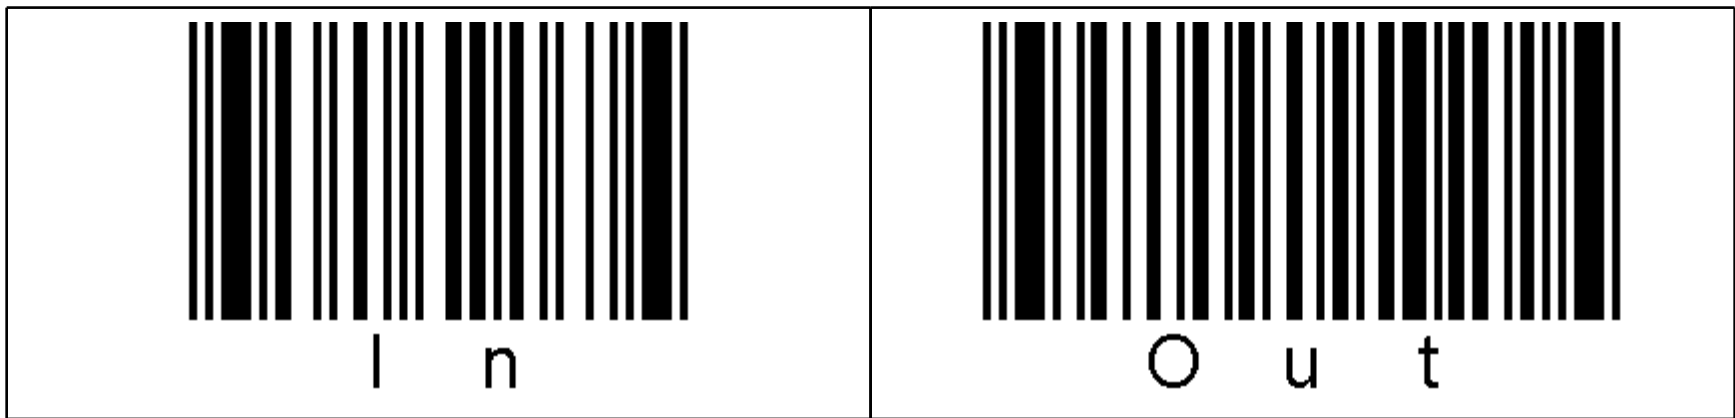


Boolean States

Yes and No

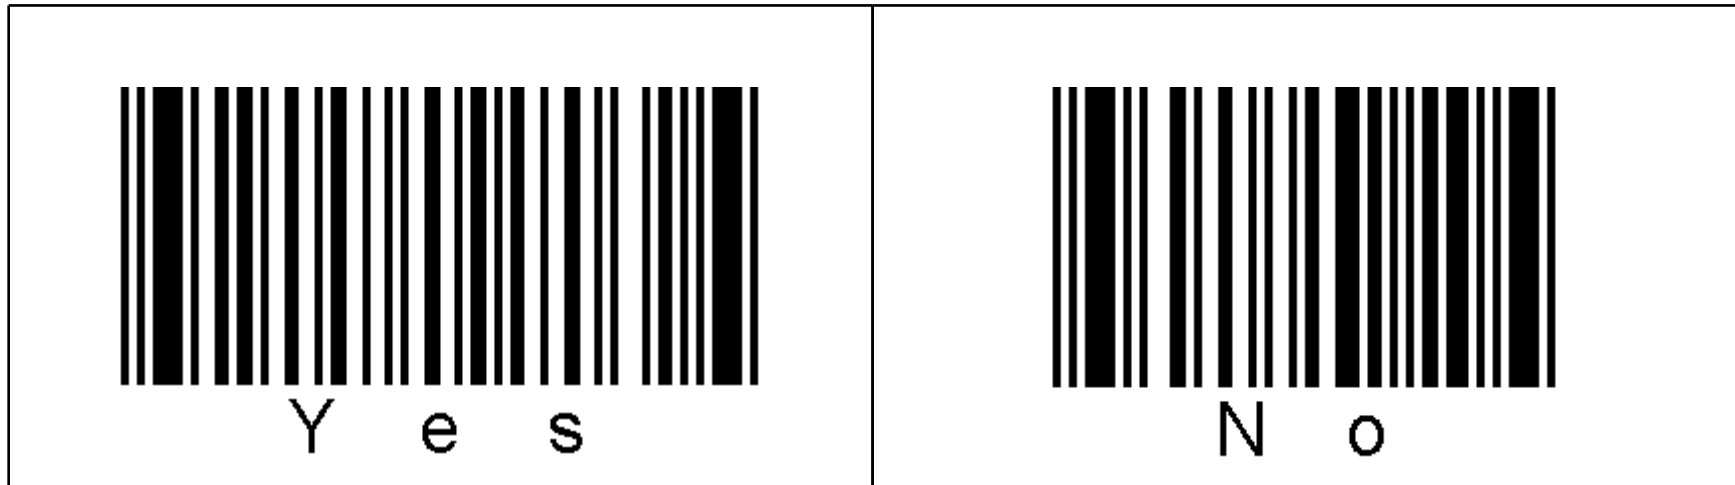


True and False

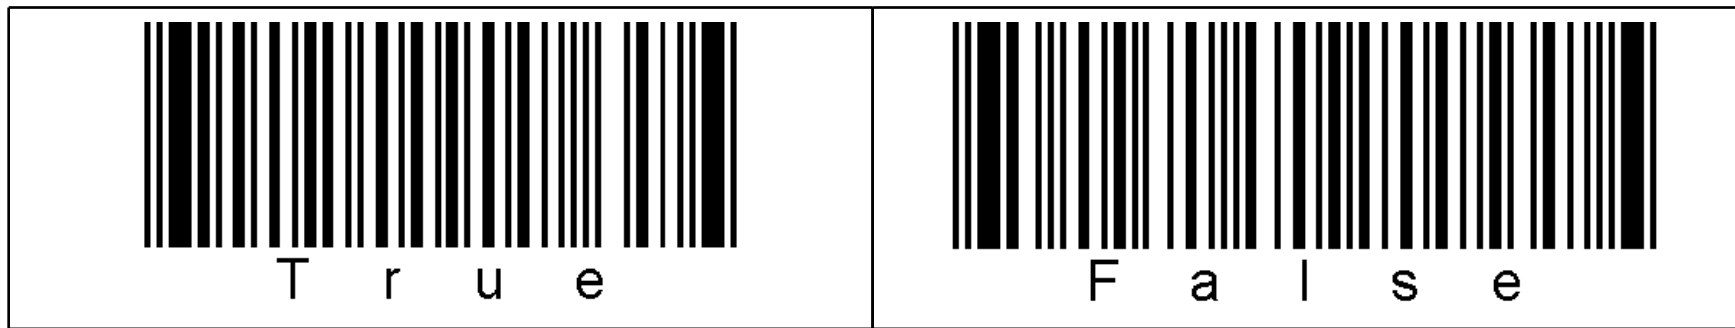


Social Science

Emotions

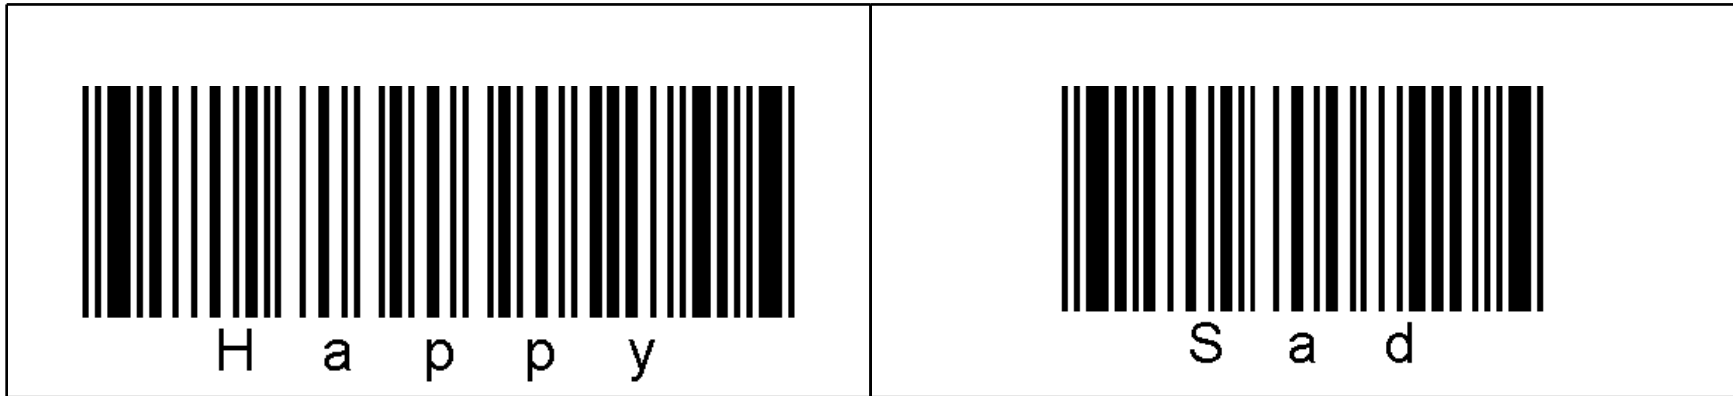


Politics


Political Affiliation

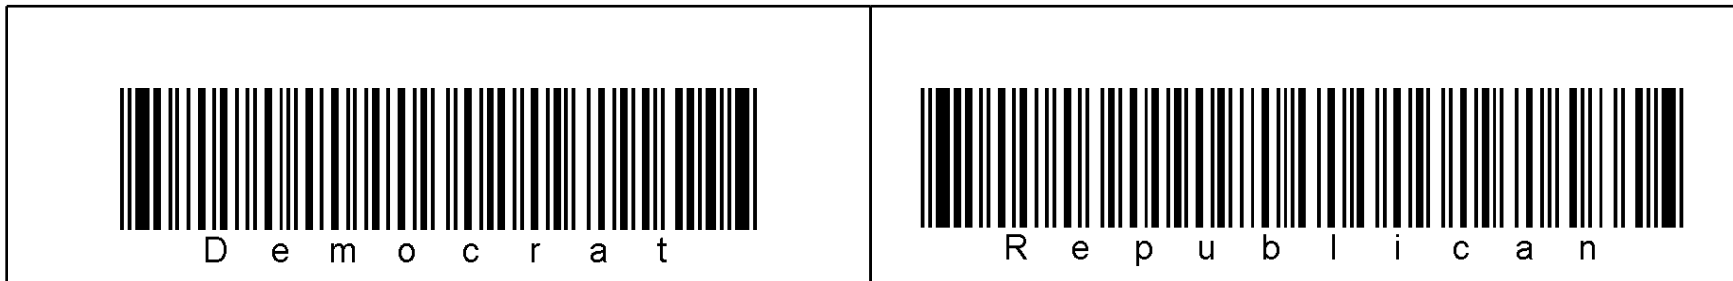

For and Against

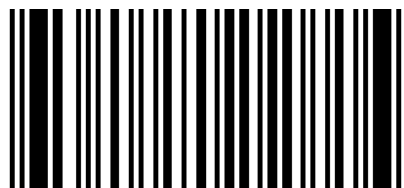


F o r

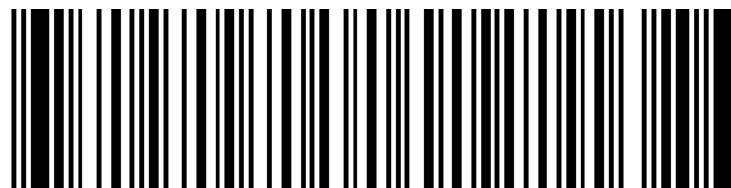

A g a i n s t

General

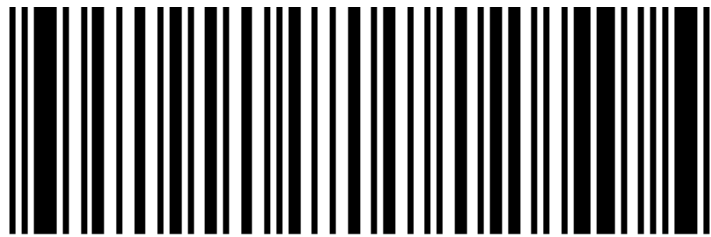

O t h e r